


INSTRUCTION MANUAL

Corded and Cordless LED Worklight

DML805

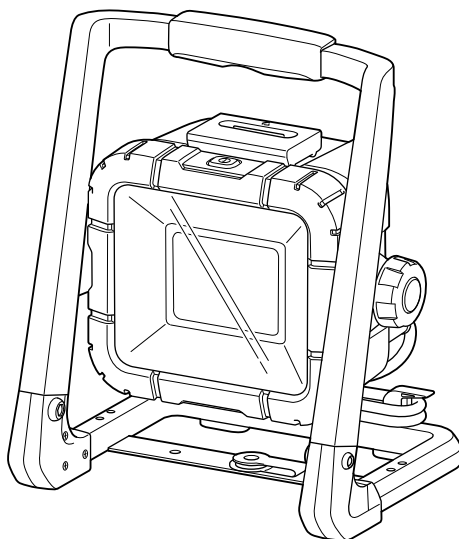

DOUBLE INSULATION

IMPORTANT: Read Before Using.

SPECIFICATIONS

Model	DML805			
LED	20 x 0.6 W			
Operating time* (with Battery BL1830)	(Approximately) High: 5 hours / Low: 10 hours			
Power source	110-130 V AC 50/60 Hz 180 mA 12 W PF 0.6 or 14.4 V / 18 V DC			
Standard battery cartridge	BL1415/BL1415N	BL1430/BL1430B/ BL1440/BL1450/ BL1460B	BL1815/BL1815N/ BL1820/BL1820B	BL1830/BL1830B/ BL1840/BL1840B/ BL1850/BL1850B/ BL1860B
Voltage (with battery operation)	14.4 V		18 V	
Dimensions (L x W x H)	214 mm x 261 mm x 328 mm			
Net weight	2.3 kg	2.5 kg	2.4 kg	2.6 kg
Pressure receiving area (Lens area)	0.0195 m ²			

- Due to our continuing program of research and development, the specifications herein are subject to change without notice.
 - Specifications and battery cartridge may differ from country to country.
 - Weight, with battery cartridge, according to EPTA-Procedure 01/2003
- * This value is only advisory. This may vary according to the condition and environment of the battery.

Symbols

The following show the symbols used for the equipment.
Be sure that you understand their meaning before use.



- Read instruction manual.



- Indoor use only



- Only for EU countries
Do not dispose of electric equipment or battery pack together with household waste material!
In observance of the European Directives, on Waste Electric and Electronic Equipment and Batteries and Accumulators and Waste Batteries and Accumulators and their implementation in accordance with national laws, electric equipment and batteries and battery pack(s) that have reached the end of their life must be collected separately and returned to an environmentally compatible recycling facility.



- DOUBLE INSULATION



- Optical Radiation (UV and IR).
Minimize exposure to eyes or skin.



- Use appropriate shielding or eyes protection.



- The light source contained in this luminaire shall only be replaced by the manufacture or his service agent or a similar qualified person.



- Take particular care and attention!

IMPORTANT SAFETY INSTRUCTIONS



WARNING: When using luminaires, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following:

READ ALL INSTRUCTIONS.



- CAUTION:**
1. When the luminaire is not in use, always switch off, and unplug / remove the battery cartridge from the luminaire.
 2. Do not cover or clog the luminaire with cloth or carton, etc. Covering or clogging it may cause a flame.
 3. Do not use the luminaire in damp or wet locations. Do not expose the luminaire to rain or snow. Do not wash it in water.
 4. Do not use the luminaire in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.
 5. Luminaire plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) luminaires. Unmodified plugs and matching outlets will reduce risk of electric shock.
 6. Avoid body contact with earthed or grounded surfaces such as pipes, radiators, ranges and refrigerators. There is an increased risk of electric shock if your body is earthed or grounded.