

9002/11-280-186-001 Art. No. 158848



- For the intrinsically safe operation of a wide range of devices, such as HART transmitters, solenoid valves, sensors, zero-potential contacts and many more
- Compact, space-saving devices that are easy to install on a DIN rail
- Quick and efficient installation as barriers can be simultaneously snapped onto DIN rail and connected to ground (ISA - RPI12.06)

WebCode **9002A**



The 9002 series INTRINSPAK two-channel zener barriers enable the intrinsically safe operation of virtually all field devices. The comprehensive portfolio and the combination of zener barriers cover a wide variety of signals. The devices are incredibly robust and require very little space. The back-up fuse is a convenient feature as it is standardized for all variants.

Technical Data

Explosion Protection

Application range (zones)	2
Ex interface zone	0 1 2 20 21 22
IECEEx gas certificate	IECEEx PTB 08.0057X
IECEEx gas explosion protection	Ex nA [ia Ga] IIB T4 Gc
IECEEx dust certificate	IECEEx PTB 08.0057X
IECEEx dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	PTB 01 ATEX 2053 X
ATEX gas explosion protection	Ex II 3 (1) G Ex nA [ia Ga] IIB T4 Gc
ATEX dust certificate	PTB 01 ATEX 2053 X
ATEX dust explosion protection	Ex II (1) D [Ex ia Da] IIIC
FMus certificate	3010778
Marking FMus	NONINCENDIVE FOR, Class I, Div. 2, Groups A,B,C,D; T4, Class I, Zone 2, Group IIC T4 IS connections for Class I,II,III, Div. 1, Groups C,D,F,G; Class I, Zone 0, Group IIB Hazardous location when inst. per doc. 90 026 11 31 1
ULus certificate	E81680V1S3
Marking ULus	For use in Hazardous location, Class I, Div. 2, Groups A,B,C,D; T4 Providing IS circuits for Class I,II,III, GROUPS C,D,E,F,G; per doc. 90 026 11 31 3
cCSA certificate	1284580

9002/11-280-186-001 Art. No. 158848

Explosion Protection

Marking cCSA	Associated equipment [Ex ia], Class I, Div. 2, Groups A,B,C,D; Provides IS circuits for Class I,II,III, Class I, Zone 0, Group IIB For applicable grps per inst. doc. 90 026 11 31 2
Inmetro gas certificate	UL-BR 12.0354
Inmetro dust certificate	UL-BR 12.0354
Certificates	ATEX (PTB), Brazil (ULB), Canada (CSA), China (CQST), IECEx (PTB), Japan (CML), Korea (KGS), USA (FM), USA (UL)
Notes	CCC and UKCA certificate available from 2022 onward
Installation	in Zone 2, Division 2 and in safe area
Further information	see respective certificate and operating instructions

Safety Data

Max. voltage U_o			28 V		
Max. current I_o			93 mA		
Max. power P_o			650 mW		
Intrinsically safe limiting values inductance L_o / capacitance C_o			Max. connectable inductance L_o / capacitance C_o	Jointly connectable inductance L_o / capacitance C_o	
Channel 1	IIC	L_o [mH]	2 mH	1 mH	0.100 mH
		C_o [μ F]	0.083 μ F	0.0520 μ F	0.0830 μ F
	IIB	L_o [mH]	13 mH	10 mH	1 mH
		C_o [μ F]	0.650 μ F	0.25 μ F	0.35 μ F
Channel 2	IIC	L_o [mH]	2 mH	1 mH	0.1 mH
		C_o [μ F]	0.830 μ F	0.052 μ F	0.083 μ F
	IIB	L_o [mH]	13 mH	10 mH	1 mH
		C_o [μ F]	0.650 μ F	0.25 μ F	0.35 μ F
Channel 1 + 2	IIC	L_o [mH]			
		C_o [μ F]			
	IIB	L_o [mH]	2.80 mH	1 mH	0.1 mH
		C_o [μ F]	0.551 μ F	0.34 μ F	0.551 μ F

Electrical Data

Number of channels		2					
Maximum resistance R_{max}		359 Ω					
Minimum resistance R_{min}		322 Ω					
Maximum output current I_{max}		69 mA					
Potential channel 1		Positive					
Potential channel 2		Positive					
Transmission frequency channel 1		≤ 100 kHz					
Type of voltage		DC					
I_{leak} leakage current for U_n		≤ 2 μ A					
Chan- nel	Nominal volt- age U_N	Maximum output current I_{max}	Minimum resist- ance R_{min}	Maximum resist- ance R_{max}	Maximum voltage U_o	Maximum current I_o	Maximum power P_o
1	25.00 V DC	69 mA	322 Ω	359 Ω	28 V	93 mA	650 mW
2	25 V	69 mA	322 Ω	359 Ω	28 V	93 mA	650 mW
1 + 2					28 V	186 mA	1300 mW

9002/11-280-186-001 Art. No. 158848

Auxiliary Power

Power supply	Controlled
--------------	------------

Ambient Conditions

Ambient temperature	-20 °C ... +60 °C
Ambient temperature	-4°F ... +140°F
Storage temperature	-20 °C ... +75 °C
Storage temperature	-4°F ... +167°F
Maximum relative humidity	95% average, no condensation
Temperature influence	≤ 0,25 %/10K

Mechanical Data


Degree of protection (IP)	IP40
Degree of protection (IP) terminals	IP20
Enclosure material	Polyamide 6GF
Number of connection terminals	4
Connection cross-section max.	1.5 mm ²
Connection cross-section AWG	16 AWG
Type of connection cable	Solid Finely stranded

Width	103 mm
Width, inches	4.09 in
Length	12 mm
Length, inches	0.48 in
Depth of cut-out	72 mm
Mounting depth, inches	2.76 in
Weight	0.11 kg
Weight	0.24 lb


Mounting / Installation

Earthing connection cross-section	4 mm ²
Earthing conductor cross-section AWG	12 AWG
Connection type	2 PA
Min. torque, Nm	0.5 Nm
Min. torque, lb/in	4.43 lb/in
Max. torque, Nm	0.6 Nm
Max. torque, lb/in	5.31 lb/in

Technical Drawings – Subject to Alterations




Picture B

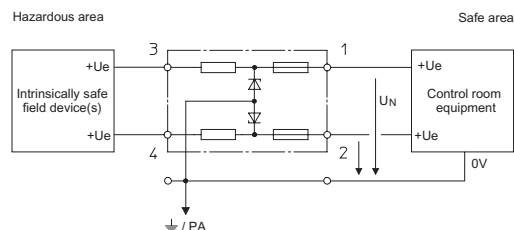


Two-channel safety barriers, potential: + / +

9002/11-280-186-001 Art. No. 158848

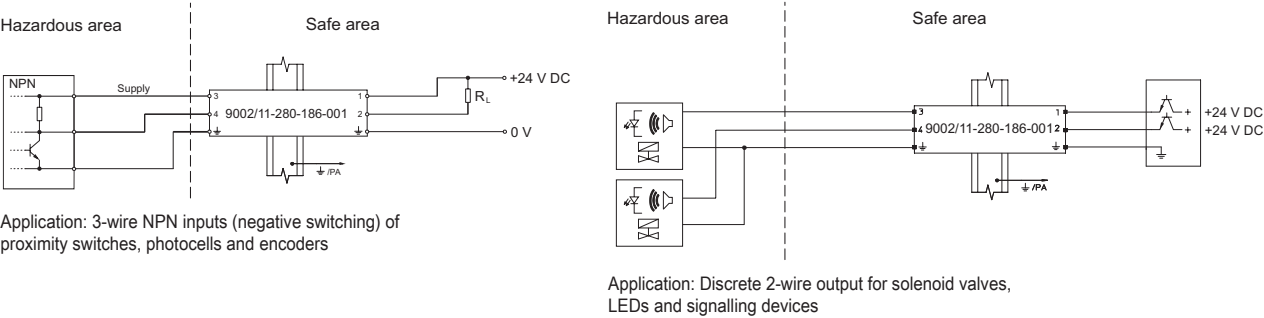

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

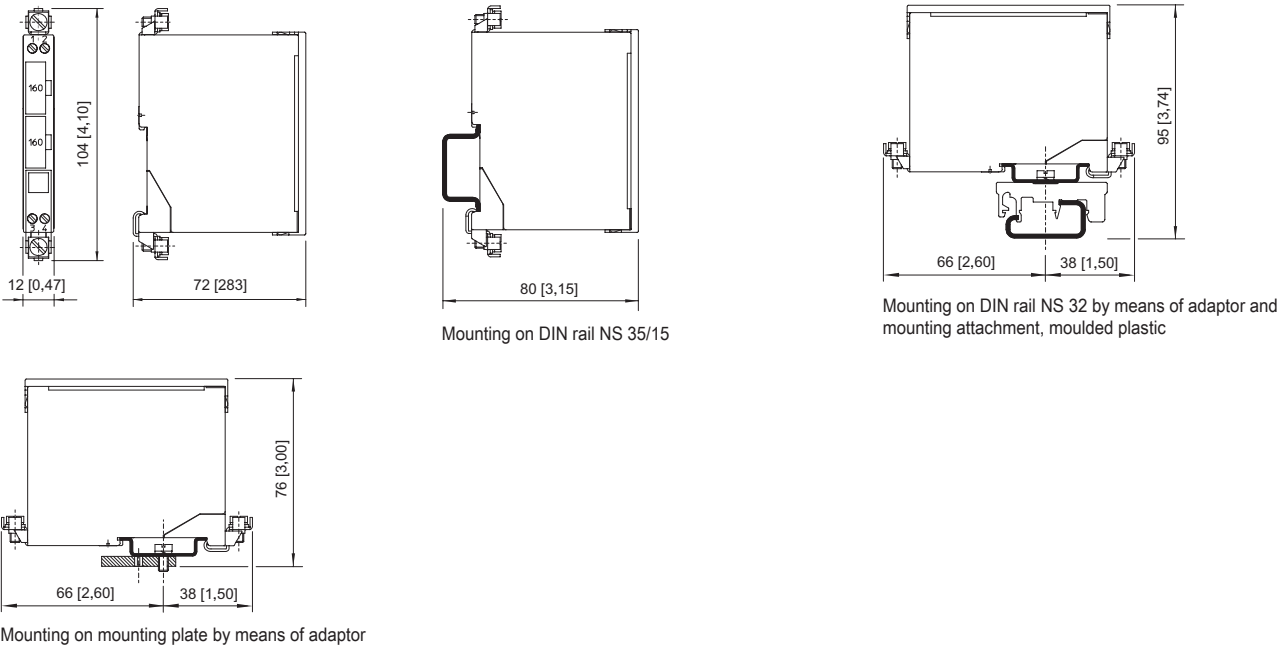


Accessories

Table with 3 columns: Accessory Name, Description, and Art. No.
Row 1: Adaptor. Description: Adaptor allows installation of a safety barrier Series 900x on a mounting plate of a previous series. Art. No.: 158826.
Row 2: Mounting attachment moulded plastic. Description: Enables mounting of safety barrier on a G-rail. Art. No.: 165283.
Row 3: Protective conductor terminal. Description: USLKG 5 (clamping range 4 mm²). Terminal enables connection of protective conductors to DIN rail. Colour green-yellow. Art. No.: 112760.

9002/11-280-186-001 Art. No. 158848

Earth terminal

Art. No.



USLKG 6 N (wire range 6 mm²)
Terminal enables connection of protective / earthing conductors to DIN rail. Colour green-yellow.

112599


Fuse holder

Art. No.



Fuse holder is snapped onto the side of the safety barrier and can be equipped with up to 5 back-up fuses (replacement).

158834




Insulating stand off

Art. No.



Suitable for DIN rail NS35/15, allows electrically insulated mounting of DIN rail from mounting plate.


158828



Spare Parts

Back-up fuse

Art. No.



For all safety barriers Series 9001, 9002 and 9004
Packaging unit: 5 pcs.

158964

Holder for label

Art. No.



Transparent cover for labelling

158977



We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.