

Manual Activation Control

GRP PUSH BUTTON

Explosion Proof Push Button > GRP PB150 Series

Product overview

The PB150 push button range has been approved for use in potentially explosive atmospheres and harsh environmental conditions.

Typical applications are Oil and Gas, On-shore and Offshore, Chemical, Petrochemical, Refineries & Marine locations etc.

It is compatible for use with a PLC, DCS and ESD systems via 4-20mA output. It is ideally suited for use in fire alarm systems and an addressable option with diode fitted is available.

The unit has the option for either a key reset or self reset. The range also offers an additional visual LED indication option; red, green (or both) can be fitted. When fault or alarm status arises the green LED will be overridden by the red LED. The design allows for termination inside the unit.

Features/Certifications

- Approved by ATEX, IECEx
- CQST (Available on request only)
- ATEX: II 2G Exd IIC T4 - T6 (incorporating IIA & IIB)
- Zones 1, 2, 21 & 22
- Conforms to EN (IEC) 60079-0 EN (IEC) 60079-1 and EN54
- Dustproof & Weatherproof

PB150 Series > Ordering Information

Standard
Product
Selection

PB150

Switch	Duty Label	Tag Label	Reset	LED Indicator	Features	Cable Entry	Finish Colour
S = Single Switch	Y = Yes	Y = Yes	S = Self Reset	L = Red & Green R = Red	F = Lift Flap R = Resistor (specify)	A = M20	RD = Red YW = Yellow BU = Blue BL = Black OR = Other
D = Double Switch	N = No	N = No	K = Key Reset	G = Green N = No LED	D = Diode (specify) N = No Features	B = M25	

Follow the chart (right) to generate your part code.

MODEL CONFIGURATOR (By using the table above, complete this box sequence to select your required push button).

PB150								
Switch	Duty Label	Tag Label	Reset	LED Indicator	Features	Cable Entry	Finish Colour	

Note: All customers orders will be confirmed in writing. Care should be taken that the correct code has been ordered as be-spoke manufactured products cannot be returned for exchange or credit later.

Kg 4.2

°C -40+70

IP 66

INDUSTRIAL



MARINE

FIRE

APPROVALS and
CONFORMITIES



GRP

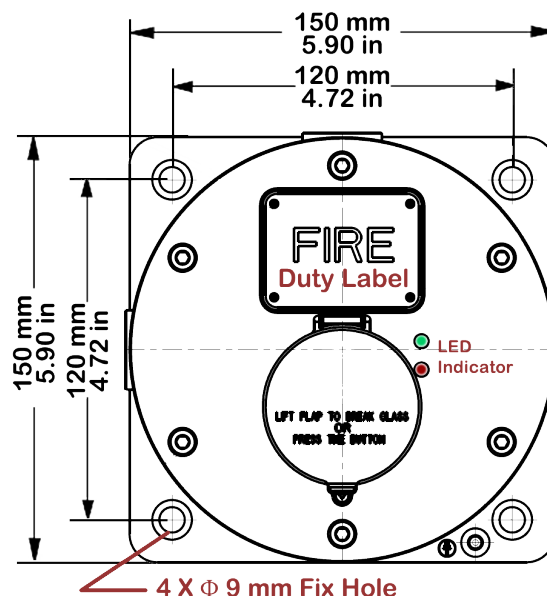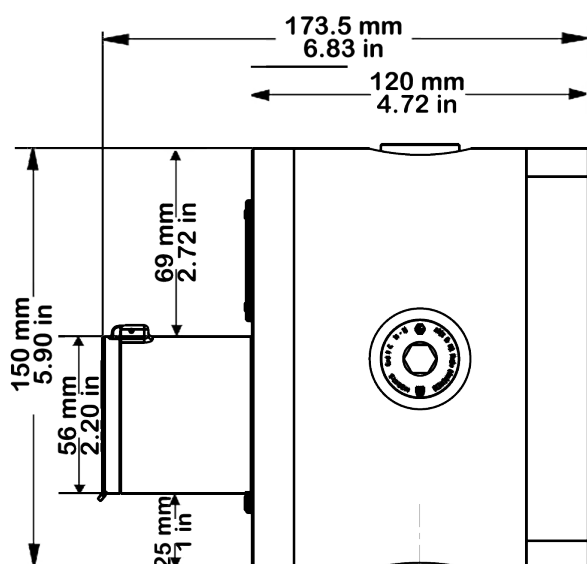

Explosion Proof Push Button > GRP PB150 Series

General Information

EX CODE:	Exd IIC T4 - T6
CERTIFICATION:	ATEX (Nemko 14 5439X), IECEx (NEM 14.0013X) CQST (Available on request only)
TYPE:	Push Button

Mechanical Specifications

MATERIAL:	Enclosure: GRP (Glass Reinforced Plastic)
ENCLOSURE COLOUR:	Red (RAL3001), Yellow (RAL1003) Blue (RAL5005), Black (RAL9004)
AMBIENT TEMPERATURE:	-40 to +70
HUMIDITY:	≤ 95% RH
WEIGHT:	4.2 Kg / 9.26 lb
DIMENSIONS:	Width/Length: 150mm / 5.91" Height: 164mm / 6.46"
INGRESS PROTECTION:	IP 66

Electrical Specifications

SWITCH RATING:	30v Dc: 6A (Resistive), 6A (Inductive) 250v Ac: 11A (Resistive), 6A (Inductive)
OUTPUT:	On-Off Output (NC/NO)
TERMINATION:	Accepts upto ≤ 2.5mm ² incorporating rising clamp protectors
CABLE ENTRY:	4 x M20 or M25. For 1/2" or 3/4"NPT requirements, male/female adapter glands are available. Contact sales dept for further part codes.

Accessories

- 50200: M20 E1EX Nickel Plated Brass Gland (Multi Armour Cone) Atex Cat 2 & 3, EExde IIC 2 GD
Cable ID 11 - 15.5mm
OD 14.5 - 21mm
Gland for Multi Armoured Cable *
- 50201: M20 A2EX Nickel Plated Brass Gland Atex Cat 2 & 3, EExde IIC 2 GD
Cable OD 11 - 15.5mm
Gland for Unarmoured Cable *
- 50202: M20 E1EX-QS Nickel Plated Brass Gland (Ex d IIC, Ex e IIC, Ex nR IIC, Ex tb IIIC)
Cable OD 14.5 - 20.5mm
Barrier Gland for Steel and Aluminium Armoured Cable *
- 50203: M20 A2EX Quick Stop Nickel Plated Brass Gland (Ex d IIC, Ex nR IIC, Ex tb IIC)
Cable OD 9 - 15mm
Barrier Gland for Unarmoured Cable *
- 50204: M20 Nickel Plated Brass Stopping Plug Atex EExde I/IIC
Standard M20 Blanking Plug
- 50221: Epoxy Minute Adhesive 24m/l tube
One tube sufficient for five barrier glands

* 25mm Thread length for GRP products

Note: M25 options available for the above