



Photo: HR2810



Photo: HR2810

Accessories

Quick change drill chuck (Drill chuck set)
For Model: HR2811FT, HR2810T
Part No. 194079-2



Dust cup
Bit dia: 6-14.5mm Part No. 421342-3
Bit dia: 12-16mm Part No. 421664-1



Dust cup set
Part No. 194580-7



Dust extractor attachment
Part No. 193472-7





Comparison of Drilling Efficiency

Note: It may differ under some conditions.

Drilling

Note: Numbers in the charts below are relative values when the capacities of competitor "B" are indexed at 100.


Test conditions: Drilled in concrete with compressive strength of 40N/mm².

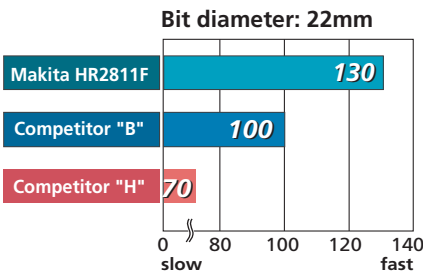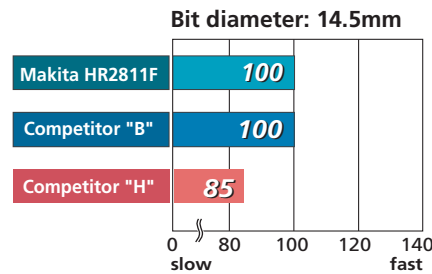

Chipping

Note: Numbers in the charts below are relative values when the capacities of competitor "H" are indexed at 100.

Test conditions: Chipped concrete with compressive strength of 40N/mm², and measured the amount of concrete removed.

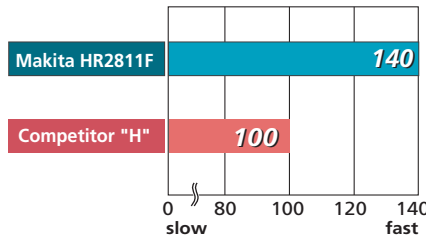

Combination Hammers		HR2811F/FT, HR2810/T		Rotary Hammer		HR2800
		HR2811F	HR2811FT	HR2810	HR2810T	HR2800
		800W	800W	800W	800W	800W
		Capacity				
		Concrete : (with diamond core bit)				
		80mm (3-1/8")	80mm (3-1/8")	80mm (3-1/8")	80mm (3-1/8")	80mm (3-1/8")
		Concrete : (with T.C.T. bit)				
		28mm (1-1/8")	28mm (1-1/8")	28mm (1-1/8")	28mm (1-1/8")	28mm (1-1/8")
		Steel :				
		13mm (1/2")	13mm (1/2")	13mm (1/2")	13mm (1/2")	13mm (1/2")
		Wood :				
		32mm (1-1/4")	32mm (1-1/4")	32mm (1-1/4")	32mm (1-1/4")	32mm (1-1/4")
		Impacts per minute (ipm)				
		0 - 4,500	0 - 4,500	0 - 4,500	0 - 4,500	0 - 4,500
		No load speed (rpm)				
		0 - 1,100	0 - 1,100	0 - 1,100	0 - 1,100	0 - 1,100
		Dimensions				
		320 x 89 x 225mm	345 x 89 x 225mm	314 x 89 x 225mm	339 x 89 x 225mm	314 x 89 x 225mm
		(12-5/8" x 3-1/2" x 8-7/8")	(13-5/8" x 3-1/2" x 8-7/8")	(12-3/8" x 3-1/2" x 8-7/8")	(13-3/8" x 3-1/2" x 8-7/8")	(12-3/8" x 3-1/2" x 8-7/8")
		Net weight				
		3.3kg (7.3lbs)	3.4kg (7.5lbs)	3.2kg (7.1lbs)	3.3kg (7.3lbs)	3.2kg (7.1lbs)
		Power supply cord				
		4.0m (13.1ft)	4.0m (13.1ft)	4.0m (13.1ft)	4.0m (13.1ft)	4.0m (13.1ft)
		Standard Equipment Quick Change Drill Chuck (HR2811FT, HR2810T only), Depth Gauge, Side Grip (Tool does not come with bit.)				

Items of standard equipment and specifications may differ by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23326-2 2007-08



Combination Hammers

HR2811F/FT, HR2810/T 28mm (1-1/8")

Rotary Hammer HR2800 28mm (1-1/8")

Satisfy Professional's Needs



SDS-Plus Shank

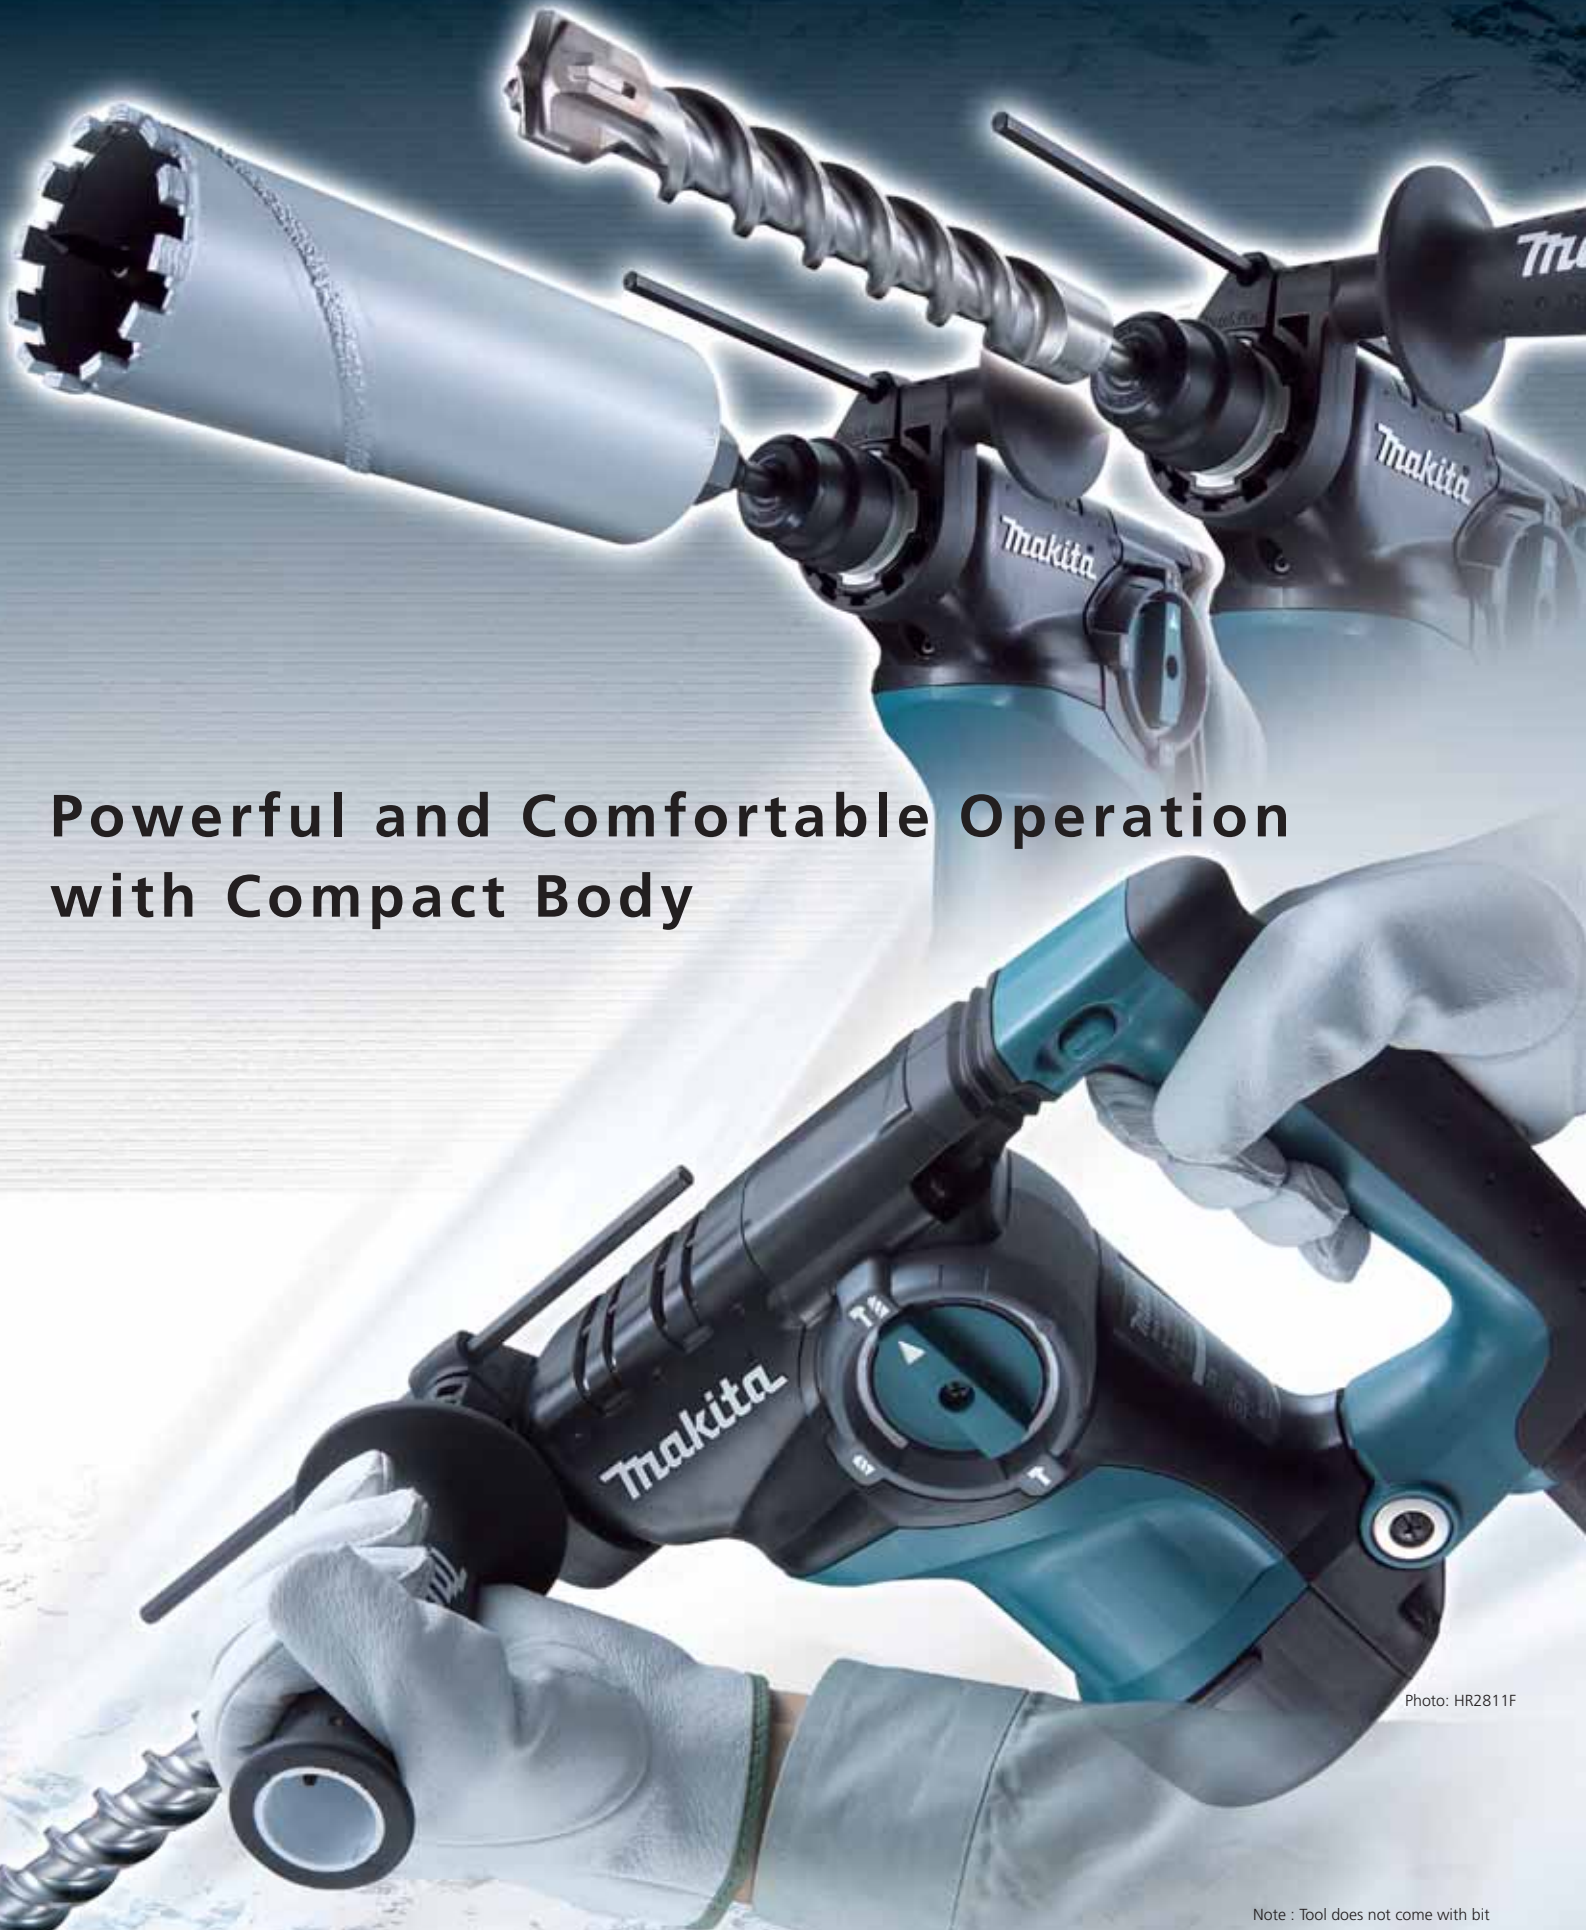


Photo: HR2811F

Note : Tool does not come with bit

Powerful and Comfortable Operation

With Low vibration and Highest-in-class efficiency in drilling and chipping

Compact Body for Better Handling

L-shaped Motor Housing shortens each distance between Rear/ Side Handles and Bit Tip

► More compact than 24mm Rotary Hammers



► Lighter weight and more compact than 30mm Rotary Hammers




Powerful
800
W

Photo: HR2811F


Reversing Switch
Operable by one hand

Rubberized Grip
Provides more control and comfort.

Bumper
Protects the surface of workpiece and machine.

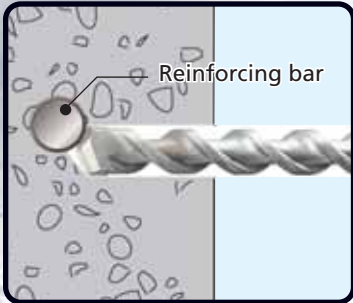


Torque Limiter
Stops bit rotation when hitting reinforcement.

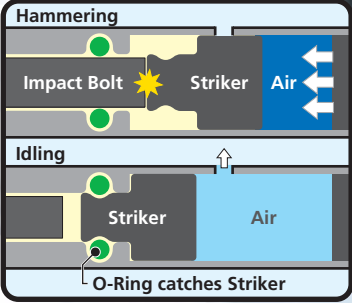

No Hammering when Idling
Ensures machine's long life.



One-Touch Sliding Chuck
for easy SDS-plus bit changes

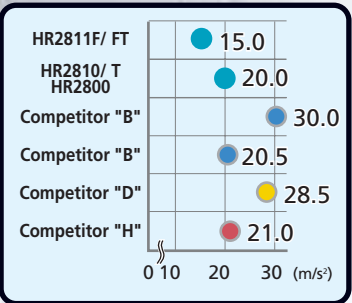


Comparison of Vibration

3 MODE

Hammering with Rotation

Rotation

Hammering



Chisel rotates full 360 degrees with 40 different locking positions.



Vibration Absorbing Grip
Spring is mounted to absorb vibration.
(HR2811F / HR2811FT only)



LED Job Light
(HR2811F / HR2811FT only)



Quick Change Chuck
SDS-plus chuck can be replaced to keyless drill chuck in a second.
(HR2811FT / HR2810T only)



HR2811F Vibration Absorbing Grip LED Job Light
HR2811FT Vibration Absorbing Grip LED Job Light Quick Change Chuck

Photo: HR2811F



HR2810
HR2810T Quick Change Chuck

Photo: HR2810

2 MODE

Hammering with Rotation

Rotation



HR2800

Tool does not come with bit.