



□ **Ref. 14L** ■ **Ref. 14LN**

Thread holder E-14. 2A 250V~. Fast connection.
Smooth body.
Douille E-14. 2A 250V~. Connexion rapide. Corps lisse.

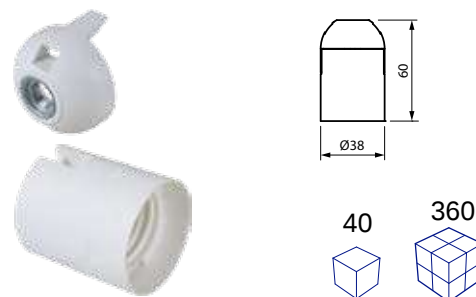


□ **Ref. 27L** ■ **Ref. 27LN**

Thread holder E-27. 4A 250V~. Fast connection.
Smooth body.
Douille E-27. 4A 250V~. Connexion rapide. Corps lisse.

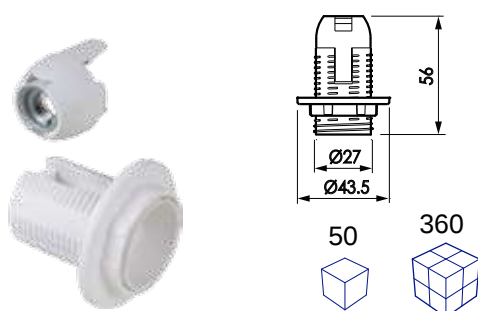


□ **Ref. 14R** ■ **Ref. 14RN**

Thread holder E-14. 2A 250V~. Fast connection.
Thread skirt.
Douille E-14. 2A 250V~. Corp fileté.

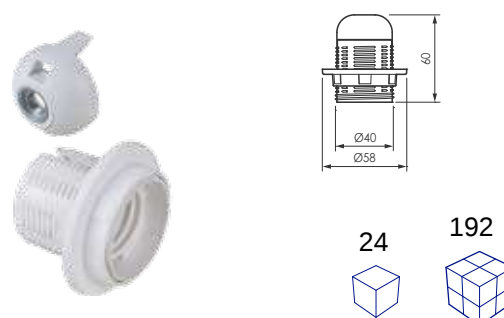


□ **Ref. 27R** ■ **Ref. 27RN**

Thread holder E-27. 4A 250V~. Fast connection.
Thread skirt.
Douille E-27. 4A 250V~. Corp fileté.

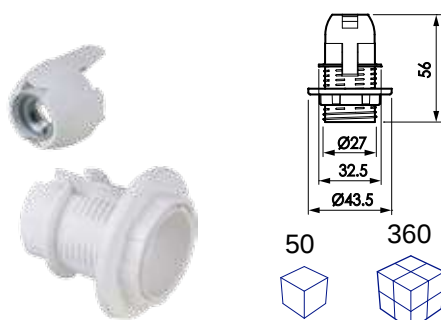

□ **Ref. 14RT** ■ **Ref. 14RTN**


Thread holder E-14. 2A 250V~. Fast connection.
Thread skirt with shade ring holder.
Douille E-14. 2A 250V~. Corp fileté avec verrouillage.

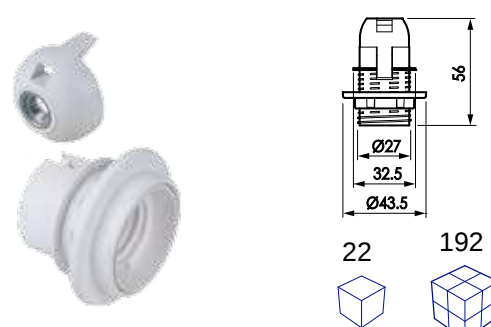

□ **Ref. 27RT** ■ **Ref. 27RTN**

Thread holder E-27. 4A 250V~. Fast connection.
Thread skirt with shade ring holder.
Douille E-27. 4A 250V~. Corp fileté avec verrouillage.

FOR CONSTRUCTION

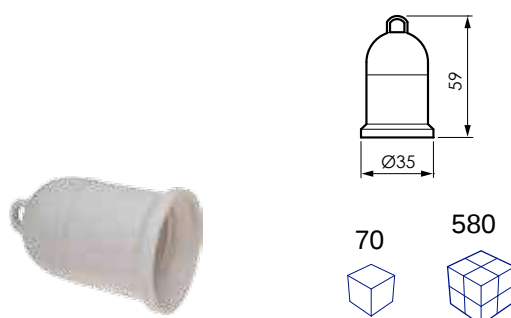

□ **Ref. 6618** ■ **Ref. 6618N**

Thread holder E-27. 4A 250V~. Thermoset resin.
Screw connection.
*Douille E-27. 4A 250V~. Résine thermodurcissable.
Branchement par vis.*



□ **Ref. 18** ■ **Ref. 18N**

Thread holder E-27. 4A 250V~. Thermoset resin.
Fast connection.
*Douille E-27. 4A 250V~. Résine thermodurcissable.
Connexion rapide.*