




Description & characteristics

Used for installation in consumer units for lighting, all type of pumps, airconditioning, electrical heating to assure a long life of these devices.

- Voltage: 240V/500V AC / 50-60Hz
- Connection cable capacity: 1 – 25 mm²

References

REF	Poles	Dimensions	Intensity	Int (A)	Power (kW)		Voltage	Contact type
		Mod. Din	AC-7a/AC1	AC-7b/AC1	AC-7a /230V	AC-7b/230V		
CM2A25	2	1	25	8.5	5	1,4	230V	2NO
CM2A63	2	2	63	25	13	4	230V	2NO
CM4A25	4	3	25	8,5	15	4	230V	4NO
CM4A63	4	3	63	25	40	13	230V	4NO

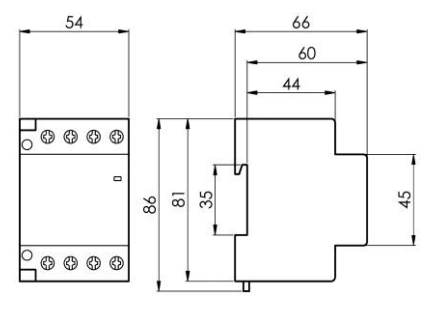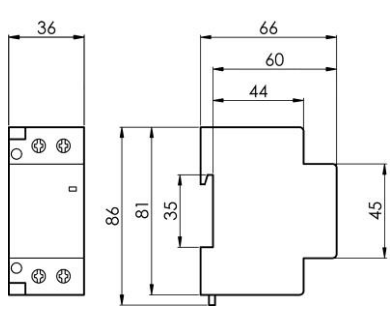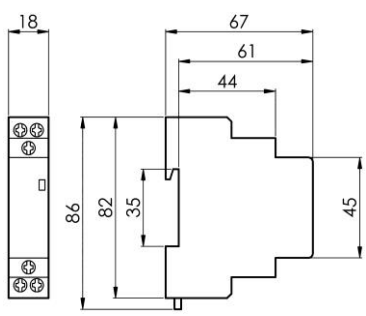

Specifications

- Compliance with standards
- Directive RoHS

Technical Data

- Fire resistance GWT 850°C (Glow Wire Temperature)
- HALOGEN FREE material

