


ALR Reducing connector

for single- and multi-wire Al cables

Material: aluminum

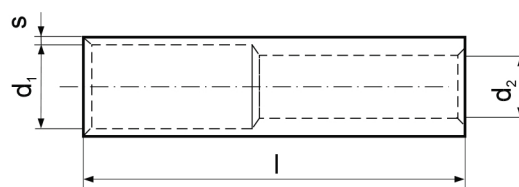

Cross section mm ² /sm		Symbol	s [mm]	d ₁ [mm]	d ₂ [mm]	l [mm]	Dies discriminant	Crimping tools
z	na							
25	16	ALR 25-16	2,6	6,8	5,5	75	12	
35	16	ALR 35-16	3	8	5,5	90	14	
	25	ALR 35-25			6,8			R50 + as below
50	25	ALR 50-25	3,1	9,8	6,8	90	16	
	35	ALR 50-35			8			
70	25	ALR 70-25	3,65	11,2	6,8	110	18	
	35	ALR 70-35			8			
	50	ALR 70-50			9,8			EPZC300, EPZ300, GZ300, HRZ300, PRZ240, GO300, GU300, HR300, GU120, HR100-U, PR240, PR95A
95	25	ALR 95-25	4,4	13,2	6,8	110	22	
	35	ALR 95-35			8			
	50	ALR 95-50			9,8			
	70	ALR 95-70			11,2			
120	35	ALR 120-35	4,15	14,7	8	110	22	
	50	ALR 120-50			9,8			
	70	ALR 120-70			11,2			EPZC300, EPZ300, GZ300, HRZ300, PRZ240, GO300, GU300, HR300, PR240
	95	ALR 120-95			13,2			
150	50	ALR 150-50	4,35	16,3	9,8	130	25	
	70	ALR 150-70			11,2			
	95	ALR 150-95			13,2			
	120	ALR 150-120			14,7			
185	70	ALR 185-70	5,1	18,3	11,2	130	28	
	95	ALR 185-95			13,2			
	120	ALR 185-120			14,7			
	150	ALR 185-150			16,3			
240	95	ALR 240-95	5,5	21	13,2	150	32	
	120	ALR 240-120			14,7			EPZC300, EPZ300, GZ300, HRZ300, GO300, GU300, HR300
	150	ALR 240-150			16,3			
	185	ALR 240-185			18,3			
300	150	ALR 300-150	5,35	23,3	16,3	160	34	
	185	ALR 300-185			18,3			
	240	ALR 300-240			21			
400	185	ALR 400-185	6,25	26	18,3	170	38	
	240	ALR 400-240			21			
	300	ALR 400-300			23,3			
500	240	ALR 500-240	7,5	29	21	180	44	
	300	ALR 500-300			23,3			GU625
	400	ALR 500-400			26			
625	300	ALR 625-300	8,5	33	23,3	190	52	
	400	ALR 625-400			26			
	500	ALR 625-500			29			

Production on request. - Connectors of dimensions other than in chart.