


Data sheet: PB 400EA

Pump curves

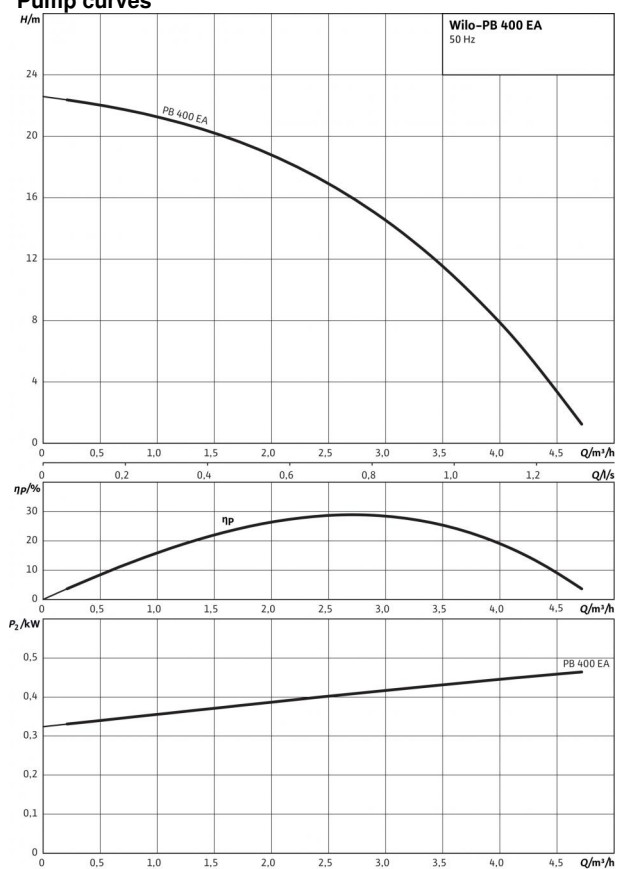

Approved fluids (other fluids on request)

Max. fluid temperature T	80 °C
Min. ambient temperature T	0 °C
Max. ambient temperature T	40 °C

Motor/electronics

Capacitor	16 µF
Phase	1 ~
Power consumption $P_{1,1}$	600 W

Materials

Pump housing	Cast iron
Impeller	Noryl
Pump shaft	1.0503 [AISI1045]
Mechanical seal	Carbon/ceramic
Seal	NBR
Protection class	IP 44

Information for order placements

Make	Wilo
Type	PB 400EA
Weight approx. m	10.5 kg
Gross weight m	12.5 kg
Art no.	3068138

Dimensions and dimensions drawings: PB 400EA

Dimensions <i>H</i>	216 mm
Dimensions <i>H1</i>	95 mm
Dimensions <i>H2</i>	118 mm
Dimensions <i>L1</i>	98 mm

Pump curves: PB 400EA

Pump curves

