



► Model EPBA

Vehicular Dual Tone Back-Up Alarm

Evacuator® back-up alarm offers superior reliability with exceptional warning power. Evacuator alarms utilize piezo-electric circuitry and solid-state components to minimize the effects of vibration and reduce amp draw. To seal out moisture and contaminants, the unique nickel-plated terminal inserts are hermetically sealed, and the housing is environmentally sealed.


The Evacuator back-up alarm includes a dual function feature. The dual function feature allows the alarm to produce two distinctly different tones by reversing the polarity of the wiring. Normal polarity produces a “Pulsed” tone, which is an intermittent signal that is primarily use for back-up warning. Reversed polarity produces a “Constant-On” tone, which is a continuous signal that can be used to signal motion such as the lifting of a truck platform or gate.

FEATURES

- Dual function - two tones available
- Impact resistance housing
- Universal mounting bracket included
- Low amp draw
- Sealed against moisture and contaminants
- Protected against voltage spikes
- SAE J994, MSHA, and OSHA approved

MODEL	VOLTAGE	OPERATING CURRENT	DECIBELS 4'	SOUND FREQUENCY
EPBA	9-48VDC	0.015 amps	97 dBa	2.4kHz

Vehicular Dual Tone Back-Up Alarm (EPBA)

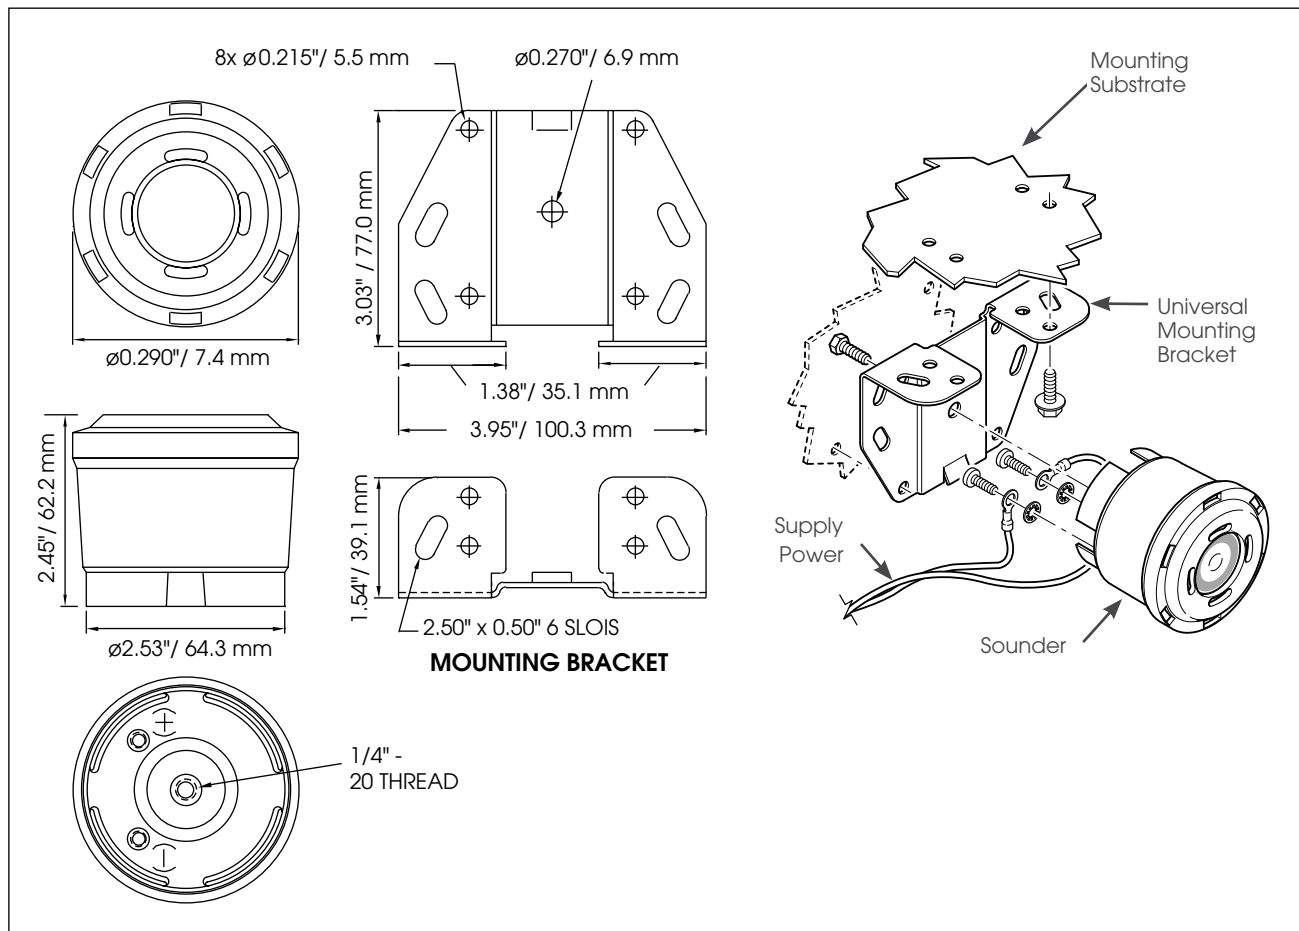

SPECIFICATIONS

Operating Temperature:	-40°F to 165°F	-40°C to 74°C
Weight:	0.6 lbs	0.3 kg
Shipping Weight:	0.6 lbs	0.3 kg
Length:	2.9"	73.7 mm
Width:	2.9"	73.7 mm
Height:	2.4"	61.0 mm

HOW TO ORDER

Specify Model:
EPBA – Evacuator vehicular back-up alarm, dual tone, 12-48VDC