

## 8000 A 5 - STRAIGHT CIRCLIP PLIERS FOR EXTERNAL RETAINING RINGS



- > Straight tips.
- > Black, tips and lock lever zinc plated.
- > The toothed bracket stops the pliers legs from straddling beyond the permitted working area.
- > This ensures safe working even in hidden fitting positions.
- > Locking pin can be replaced.
- > Non-crush type release lever with handle recesses, red dip insulated.
- > Precision machined, oil hardened and annealed.
- > E-8000 A = pair of spare tips.



Code	No.	●"inch	●mm	↳ mm ↳	
<b>6701890</b>	8000 A 5	4.13/16-11.7/8	122-300	550	1900
<b>5701840</b>	E-8000 A 5 Spare Tips				72

## 8000 A 51 - BENT CIRCLIP PLIERS FOR EXTERNAL RETAINING RINGS



- > 90° angled tips.
- > Tips and lock lever zinc plated.
- > Lever handle end red dip insulated.
- > Finger protection.
- > Reinforced safety arms.
- > Precision machined, oil hardened and annealed.
- > E-8000 A = pair of spare tips.



Code	No.	●"inch	●mm	↳ mm ↳	
<b>6702860</b>	8000 A 51	4.13/16-11.7/8	122-300	560	1898
<b>5702810</b>	E-8000 A 51 Spare Tips				112

### Circlip pliers for internal retaining rings (bores)

## 8000 J 0 - J 4 - STRAIGHT CIRCLIP PLIERS FOR INTERNAL RETAINING RINGS



Form C

- > For retaining rings as per DIN 472, DIN 984.
- > DIN 5256 Form C.
- > Straight tips.
- > Forged Gedore Chrome Vanadium special hardened and tempered steel.
- > Precision machined, oil hardened and annealed.
- > Black, with blue dipped handles.




Code	No.	○"inch	○mm	
<b>6703240</b>	8000 J 0	3/8-9/16	8-13	80
<b>6703320</b>	8000 J 1	3/8-1	12-25	81
<b>6703400</b>	8000 J 2	3/4-2.3/8	19-60	164
<b>6703590</b>	8000 J 3	1.5/8-4	40-100	281
<b>6703670</b>	8000 J 4	3.3/8-5.1/2	85-140	472

## 8000 J 01 - J 41 - BENT CIRCLIP PLIERS FOR INTERNAL RETAINING RINGS



Form D

- > For retaining rings as per DIN 472, DIN 984.
- > DIN 5256 Form D.
- > 90° angled tips.
- > Forged Gedore Chrome Vanadium special hardened and tempered steel.
- > Precision machined, oil hardened and annealed.
- > Black, with blue dipped handles.

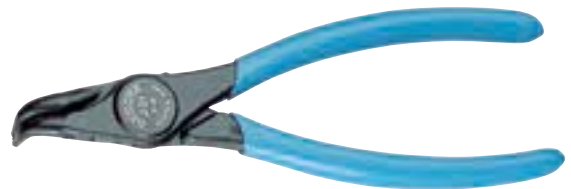

Code	No.	○"inch	○mm	
<b>6704130</b>	8000 J 01	3/8-9/16	8-13	80
<b>6704210</b>	8000 J 11	3/8-1	12-25	82
<b>6704480</b>	8000 J 21	3/4-2.3/8	19-60	161
<b>6704560</b>	8000 J 31	1.5/8-4	40-100	279
<b>6704640</b>	8000 J 41	3.3/8-5.1/2	85-140	484