



# P13 Position Coupler, Plain, Worldwide Design



- Designed to splice the same diameter bars
- Designed to splice two curved, bent or straight bars, when neither bar can be rotated and where the ongoing bar is NOT free to move in its axial direction
- Adjustability in the female end of the coupler allows the coupler to extend out to meet the taper-threaded reinforcing bar

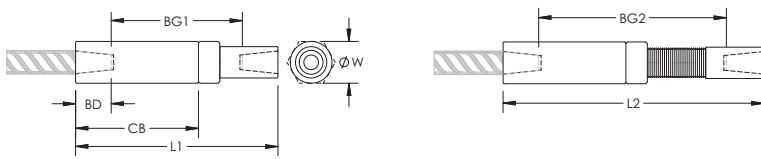

Material: Steel

Finish: Plain

Design Version: Worldwide (Globally Available Materials)

Coupler Adjustment: Standard

Part Number	Rebar Size, Metric (mm)	Rebar Size, US	Rebar Size, Canada (M)	Ø (mm)	L1 (mm)	L2 (mm)	BD (mm)	BG1 (mm)	BG2 (mm)	CB (mm)	Unit Weight (kg)	Certifications
EL10P13LN	10	#3	-	25	120	155	18	84	119	70	0.36	ITB
EL12P13LN	12	#4	10	25	124	159	19	86	121	75	0.36	ITB
EL14P13LN	14	-	-	25	134	172	21	92	130	82	0.37	ITB
EL16P13LN	16	#5	15	30	144	186	24	96	138	89	0.59	ITB
EL18P13LN	18	-	-	35	162	208	29	104	150	101	0.85	ITB
EL20P13LN	20	#6	20	35	199	260	35	129	190	126	1.09	ITB
EL22P13LN	22	#7	-	40	210	273	37	136	199	132	1.55	ITB
EL25P13LN	25	#8	25	45	221	287	40	140	207	140	1.94	ITB
EL28P13LN	28	#9	30	50	229	298	42	145	214	147	2.53	ITB
EL30P13LN	30	-	-	55	262	340	52	158	236	169	3.35	-
EL32P13LN	32	#10	-	60	249	321	45	159	231	156	3.96	ITB
EL34P13LN	34	-	-	60	280	362	55	170	252	177	4.28	-
EL36P13LN	36	#11	35	65	271	349	52	167	245	172	5.01	-
EL38P13LN	38	#12	-	70	277	357	53	171	251	175	6.05	-
EL40P13LN	40	-	-	70	290	374	57	176	260	184	6.18	ITB
EL43TP13LN	43	#14	45	75	341	433	66	209	301	214	8.24	-
EL50TP13LN	50	-	-	90	358	454	70	218	314	224	11.97	-
EL57TP13LN	57	#18	55	100	404	513	83	238	347	256	17.11	-

Designed to Meet

AASHTO, ABNT NBR 8548:1984, ACI 318 Type 1 (125% Specified Yield), ACI 318 Type 2 (Specified Tensile), ACI 349, ACI 359, AS3600, BS EN 1992-1-1, BS EN 1992-2, CAN/CSA - N287.2/.3/.4, DIN EN 1992-1-1, Eurocode 2, IBC Type 1 (125% Specified Yield), IBC Type 2 (Specified Tensile), ISO 15835, NEN EN 1992-1-1, NF A 35-020-1, NF EN 1992-1-1, ÖNORM EN 1992-1-1, Sellafield Ltd. Std. ES\_0\_3110, US Army Corps of Engineers

Bar dimensions and weights listed may vary by region. Coupler sizes not shown may be available by special order. Contact your nVent LENTON representative for more information.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.erico.com](http://www.erico.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2020 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.