



P13 Position Coupler, Female Only, Worldwide Design



Used in segmental pour and closure pour applications. Male and female components are sold separately.

- Designed to splice two curved, bent or straight bars, when neither bar can be rotated and where the ongoing bar is NOT free to move in its axial direction
- Adjustability in the female end of the coupler allows the coupler to extend out to meet the taper-threaded reinforcing bar

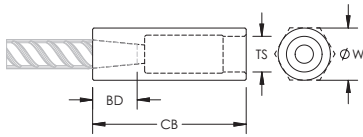

Material: Steel

Finish: Plain

Coupler Adjustment: Standard

Part Number	Rebar Size, Metric	Rebar Size, US	Rebar Size, Canada	Diameter Ø	Coupler Body CB	Bar Depth BD	Thread Size TS	Unit Weight
EL10P13LFN	10 mm	#3	-	25 mm	70 mm	18 mm	M18	0.17 kg
EL12P13LFN	12 mm	#4	10M	25 mm	75 mm	19 mm	M18	0.17 kg
EL14P13LFN	14 mm	-	-	25 mm	82 mm	21 mm	M18	0.18 kg
EL16P13LFN	16 mm	#5	15M	30 mm	89 mm	24 mm	M22	0.28 kg
EL18P13LFN	18 mm	-	-	35 mm	101 mm	29 mm	M24	0.47 kg
EL20P13LFN	20 mm	#6	20M	35 mm	126 mm	35 mm	M26	0.52 kg
EL22P13LFN	22 mm	#7	-	40 mm	132 mm	37 mm	M31	0.68 kg
EL25P13LFN	25 mm	#8	25M	45 mm	140 mm	40 mm	M34	0.95 kg
EL28P13LFN	28 mm	#9	30M	50 mm	147 mm	42 mm	M37	1.25 kg
EL32P13LFN	32 mm	#10	-	60 mm	156 mm	45 mm	M42	2.11 kg
EL36P13LFN	36 mm	#11	35M	65 mm	172 mm	52 mm	M46	2.62 kg
EL40P13LFN	40 mm	-	-	70 mm	184 mm	57 mm	M53	2.97 kg

Bar dimensions and weights listed may vary by region. Coupler sizes not shown may be available by special order. Contact your nVent LENTON representative for more information.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2020 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.