


MPT Joints

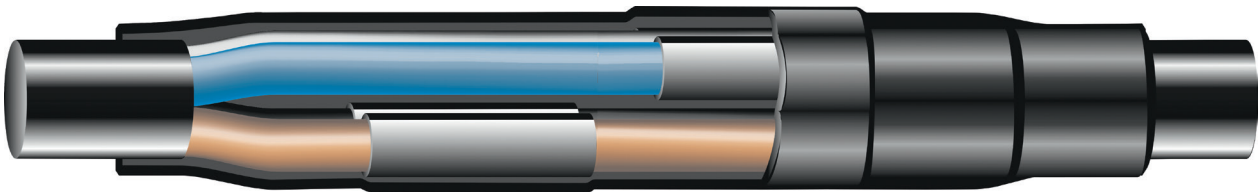

Joints are used to connect Y/A/KY and Y/A/KXS power cables with voltage 0,6/1 kV.

- insulation of wires repaired using thickened heat shrinkable tubing with an inner layer of hot melt glue
- mechanical protection and external sealing is made of a coating heat shrinkable pipe with glue

Symbol	Number of veins	Cross-section		The length L [m]
		min	max	
MPT_1-CX1-10-25/1	1	1x10	1x25	0,5
MPT_2-CX1-16-70/1	1	1x16	1x70	0,75
MPT_3-CX1-70-120/1	1	1x70	1x120	1
MPT_4-CX1-120-150/1	1	1x120	1x150	1
MPT_5-CX1-120-300/1	1	1x120	1x300	1
MPT_1-CX4-10-25/1	4	4x10	4x25	0,8
MPT_2-CX4-16-70/1	4	4x16	4x70	0,8
MPT_3-CX4-70-120/1	4	4x70	4x120	0,8
MPT_4-CX4-120-150/1	4	4x120	4x150	1
MPT_5-CX4-120-300/1	4	4x120	5x300	1
MPT_2-CX5-16-70/1	5	5x16	5x70	0,8
MPT_5-CX5-120-300/1	5	5x120	5x300	1