




- **Anti-corrosion protection:** zinc-plated coating.
- **Connecting screws:** with head pozi drive Z2 (from PX-30-015 to PX-30-076) or with hexagonal head (from PX-30-088 to PX-30-168).

PIPE CLAMPS FOR COLD SYSTEMS PX-30

Clamps with PUR insert, insulation thickness 30 mm												
External pipe diameter D [mm] Cu [d]Fe [d]	Thickness insulation G [mm]	Length insulation B [mm]	Connection		Clamp dimensions A x g [mm]L [mm]	Permissible load [kN]	Mass [kg]	Designation for the order	Part number	Download file DWG		
			Version	Size M ₁ High h [mm]								
15	30	50	M10/M12	17,5 A	M6	130 26x2,5	2,50	0,38	PX-30-015	0213001500	Download	
18 17,2	30	50	M10/M12	17,5 A	M6	130 26x2,5	2,50	0,39	PX-30-017	0213001700	Download	
22 21,3	30	50	M10/M12	17,5 A	M6	136 26x2,5	2,50	0,43	PX-30-021	0213002100	Download	
28 26,9	30	50	M10/M12	17,5 A	M6	149 26x2,5	2,50	0,50	PX-30-026	0213002600	Download	
35 33,7	30	50	M10/M12	17,5 B	M6	146 26x2,5	2,50	0,55	PX-30-033	0213003300	Download	
42 42,4	30	50	M10/M12	17,5 B	M6	155 26x2,5	2,50	0,61	PX-30-042	0213004200	Download	
48,3	30	50	M10/M12	17,5 B	M6	170 26x2,5	2,50	0,68	PX-30-048	0213004800	Download	
54 54	30	50	M10/M12	17,5 B	M6	170 26x2,5	2,50	0,72	PX-30-054	0213005400	Download	
57 57	30	50	M10/M12	17,5 B	M6	170 26x2,5	2,50	0,75	PX-30-057	0213005700	Download	
60,3	30	50	M10/M12	17,5 B	M6	176 26x2,5	2,50	0,79	PX-30-060	0213006000	Download	
64 63,5	30	50	M10/M12	17,5 B	M6	183 26x2,5	2,50	0,83	PX-30-063	0213006300	Download	
76,1 76,1	30	75	M10/M12	17,5 B	M6	194 26x2,5	2,50	0,93	PX-30-076	0213007600	Download	
88,9 88,9	30	75	M10/M12	25,0 C	M8	220 35x3,0	3,90	1,29	PX-30-088	0213008800	Download	
108 108	30	75	M10/M12	25,0 C	M8	235 35x3,0	3,90	1,44	PX-30-108	0213010800	Download	
114,3	30	75	M10/M12	25,0 C	M8	236 35x3,0	3,90	1,51	PX-30-114	0213011400	Download	
133 133	30	100	M10/M12	25,0 C	M8	275 35x3,0	3,90	1,73	PX-30-133	0213013300	Download	
139,7	30	100	M10/M12	25,0 C	M8	284 35x3,0	3,90	1,83	PX-30-139	0213013900	Download	
159 159	30	100	M12/M16	25,0 C	M8	305 35x3,0	3,90	2,02	PX-30-159	0213015900	Download	
168,3	30	100	M12/M16	25,0 C	M8	305 35x3,0	3,90	2,09	PX-30-168	0213016800	Download	

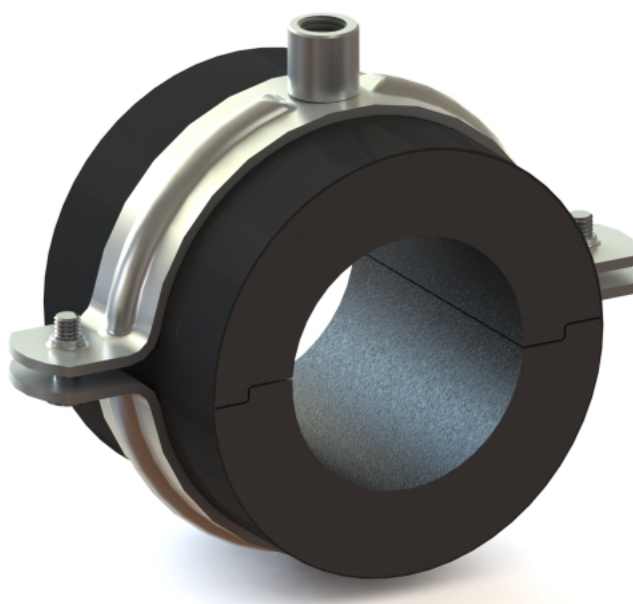