



nVent CADDY Speed Link SLK with Decking Hook – SLK15L5DH (196505)

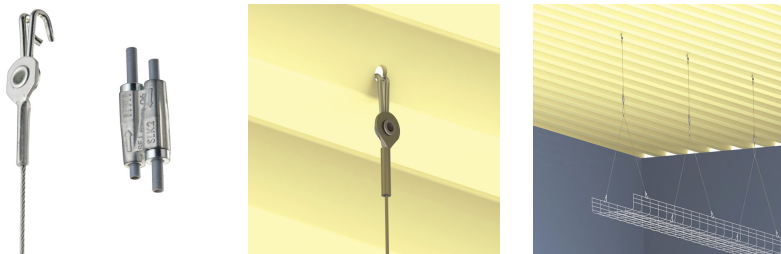

- Complete system includes wire, locking device and pre-assembled decking hook end fitting
- Quickly and easily attaches to hollow metal decking
- Spring-loaded ends snap into decking hole and lock into place
- Innovative design helps protect the wire from sharp edges of decking hole, minimizing risk of damage to wire

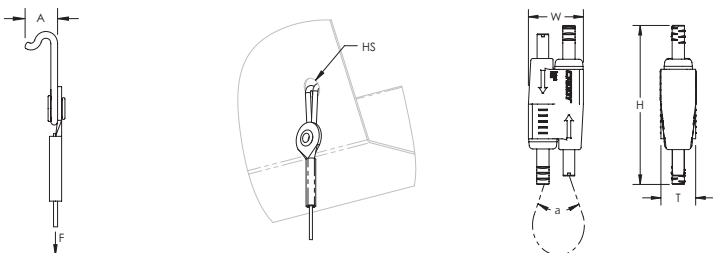

Part Number	SLK15L5DH
Article Number	196505
Material	Steel Zinc Alloy Polypropylene
Finish	Electrogalvanized
Static Load Safety Factor	5:1
Complies With	SMACNA HVAC-DCS
Wire Rope Diameter	1.5 mm
Wire Rope Length	5 m
Roof Decking Sheet Thickness	1.5 mm Max
A	9.2 mm
Hole Size (HS)	8 mm
Static Load (F)	195 N
Height (H)	55 mm
Width (W)	19 mm
Thickness (T)	12.5 mm
Angle (a)	90° Max
Certifications	cULus

Part Number	SLK15L5DH
Standard Packaging Quantity	20 pc
UPC	78285679995
EAN-13	8711893137477

Load rating is only applicable if the load-bearing capacity of the supporting element (steel decking) is adequate.
Check with deck manufacturer for recommended load capacity.

UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2021 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.

