

KLD Connector

for multi-wire Cu cables




Material: galvanically tinned copper
Non tinned on request.

Cross section [mm ²]	Symbol	Wire diameter Ø [mm]	d ₁ [mm]	d ₂ [mm]	l [mm]	Weight [g/pce]	Unit [pcs]	Crimping tools
1,5 ÷ 2,5	KLD 2,5	1,38 ÷ 1,78	1,9	3,9	25	2,08	50	D11-6,
4	KLD 4	2,25	2,3	4,2	25	2,30	50	PP8, PP19
6	KLD 6	2,75	3	5	25	2,68	50	
10	KLD 10	3,55	4	6	25	3,40	20	PP19 (Z PPH12 + SD)
16	KLD 16	4,50	5,5	8,5	35	10,14	20	+ as below
25	KLD 25	5,65	6	10	40	17,60	20	
35	KLD 35	6,70	7	10	40	13,90	10	EPZC300, EPZ300, GZ300, HRZ300, PRZ240,
50	KLD 50	8,00	8,5	12	70	35,60	10	GO300, HR300, GU300, GU120, HR100-U, PR240, PR120, PR150, R50, PR50

Production on request. - Connectors of dimensions other than in chart.

KCS Tubular terminal

for multi-wire Cu cables

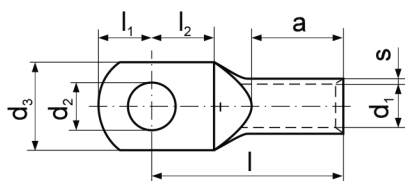

Material: galvanically tinned copper
Non tinned on request.

Cross section [mm ²]	For screw M	d ₂ [mm]	Symbol	s [mm]	d ₁ [mm]	d ₃ [mm]	a [mm]	l ₁ [mm]	l ₂ [mm]	l [mm]	Weight [g/pce]	Unit [pcs]	Dies discriminant	Crimping tools
2,5	4	4,3	KCS 4-2,5	0,95	2,3	7,5	7	5	6	17	1,66	100		
	5	5,3	KCS 5-2,5					5,5	6,2	17	1,70			
	6	6,4	KCS 6-2,5					6,7	7,3	18	1,82			
	8	8,4	KCS 8-2,5					7,3	10	22	2,05			
4	4	4,3	KCS 4-4	1	3	8,5	8	5	6	19	2,30	50		PR33, A11-6, PP19
	5	5,3	KCS 5-4					5,5	6,2	19	2,30			
	6	6,4	KCS 6-4					6,5	7,3	20	2,44			
	8	8,4	KCS 8-4					9,5	10	23	2,90			
6	4	4,3	KCS 4-6	1	4	9,5	9	5	6	20	3,26	50	6	EPZC300, EPZ300, GZ300, HRZ300, PRZ240, PR33, GO300, HR300, GU300, GU120, HR100-U, PR240, PR50, PP19, A11/6
	5	5,3	KCS 5-6					6	6,2	20	3,32			
	6	6,4	KCS 6-6					6,5	7,5	22	3,48			
	8	8,4	KCS 8-6					9,5	10	24	4,10			
10	5	5,3	KCS 5-10	1,2	4,5	12	10	7,5	8	23	5,32	50	7	EPZC300, EPZ300, GZ300, HRZ300, PRZ240, GO300, HR300, GU300, GU120, HR100-U, PR240, PR50, R50, PP19
	6	6,4	KCS 6-10					8,5	8,5	24	5,54			
	8	8,4	KCS 8-10					10	10,5	26	5,96			
	10	10,5	KCS 10-10					12	12,5	28	6,36			
16	5	5,3	KCS 5-16	1,5	5,5	13	13	8,2	8,2	28	9,96	50	8	EPZC300, EPZ300, GZ300, HRZ300, PRZ240, GO300, HR300, GU300, GU120, HR100-U, PR240, PR50, R50, PP19
	6	6,4	KCS 6-16					7,5	8,5	27	9,12			
	8	8,4	KCS 8-16					8,5	9,5	27	10,06			
	10	10,5	KCS 10-16					10,5	11,5	30	10,56			